


# Serre-fils laiton

- Bornes de terre décolletées en laiton, filetage M6 et M8.

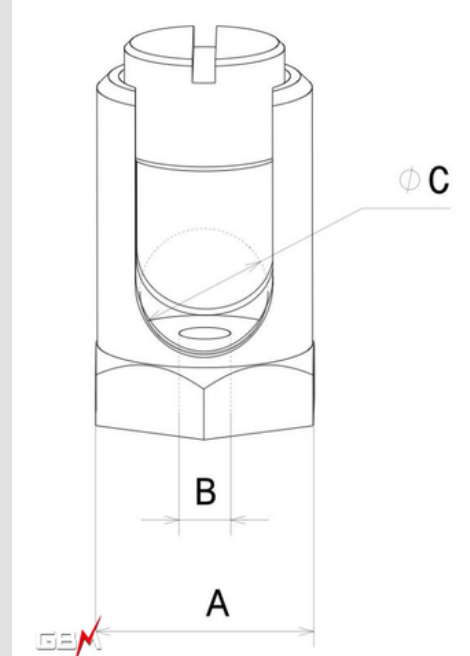

Référence	ØC Capacité des conducteurs (mm)	A (mm)	B (mm)	Poids/100 (Kg)	Conditionnement (Pces)
BL25-6	3-6 mm	17	M6	2,39	50
BL25-8	3-6 mm	17	M8	2,3	50
BL35-6	4-8 mm	18	M6	2,95	50
BL35-8	4-8 mm	18	M8	2,95	50
BL50-6	7-10 mm	21	M6	4,6	50
BL50-8	7-10 mm	21	M8	4,5	50
BL95-6	8-12 mm	24	M6	6,4	25
BL95-8	8-12 mm	24	M8	6,35	25
BL120-6	10-14 mm	26	M6	8,5	25
BL120-8	10-14 mm	26	M8	8,4	25
BL150-6	10-16 mm	30	M6	13,5	25
BL150-8	10-16 mm	30	M8	14	25
BL185-6	12-18 mm	32	M6	14	15
BL185-8	12-18 mm	32	M8	14,3	15
BL240-6	16-20 mm	36	M6	22,1	10
BL240-8	16-20 mm	36	M8	19,8	10

\*Autres filetages possibles sur demande